

ELEVATE YOUR SPACE WITH
**PREMIUM
CLADDING**

1300 481 664

WWW.BRITEDECKING.COM.AU



LOW MAINTENANCE



DURABLE



FIRE TESTED





WATERPROOF



TERMITE RESISTANT




10-YEAR WARRANTY

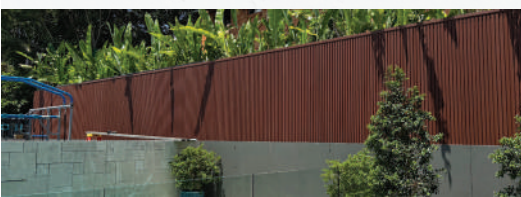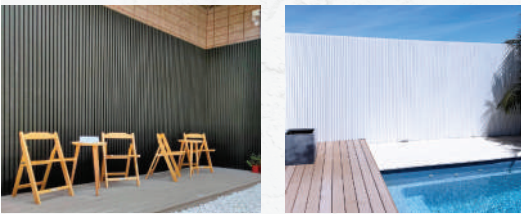

Engineered for the harsh Australian climate, our low-maintenance composite cladding resists warping, twisting, and degradation. Made from recycled materials, it has been rigorously fire-tested and offers outstanding resistance to termites and water—providing long-lasting protection for your property. Enjoy the perfect balance of durability and style, backed by a 10-year warranty.


SPECIFICATIONS

VISIBLE WIDTH	THICKNESS	SPAN	LENGTH	BOARD WEIGHT	WEIGHT PER SQM
200mm	26mm	400 - 500mm	5400mm	15.5kg	14.5kg

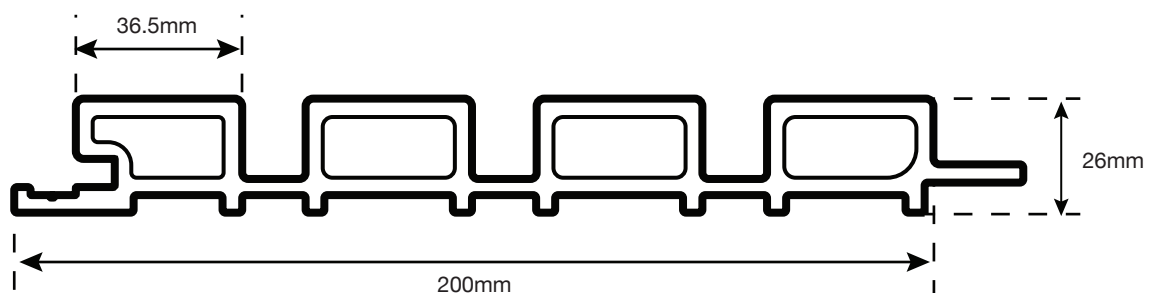

AVAILABLE IN STUNNING COLOURS

FRENCH OAK



COUNTRY TEAK



KOHU MERBAU



SHADOW GREY



BLACK WOOD




CLOUD WHITE



CLOUD GREY



MIDNIGHT TEAK
DUAL COLOUR




MIDNIGHT WHITE
DUAL COLOUR




TRIM SYSTEM

Cladding trim systems are designed to seamlessly blend with your cladding material, creating a clean and polished appearance. They cover the edges and joints of cladding panels, providing a neat and uniform look while also safeguarding against moisture infiltration and air leakage.


STARTER TRIM



CROSSROAD TRIM




ANGLE TRIM




CLADDING TEST CERTIFICATES




CLADDING INSTALLATION GUIDE

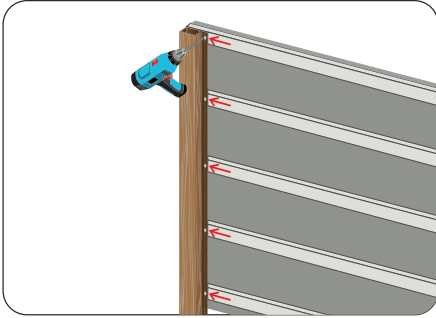


1 Secure the Starter Trim onto the batten using screws.

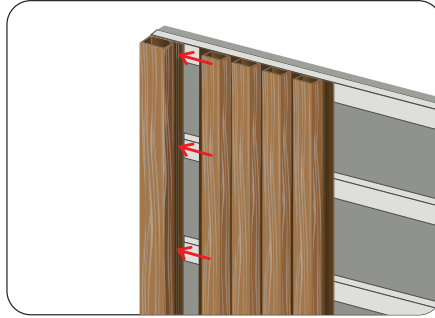


2 Begin by placing the first cladding board into the trim.

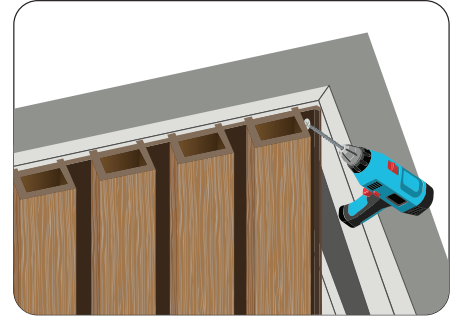


3 Measure and mark the required width of the final cladding board at the inside corner.

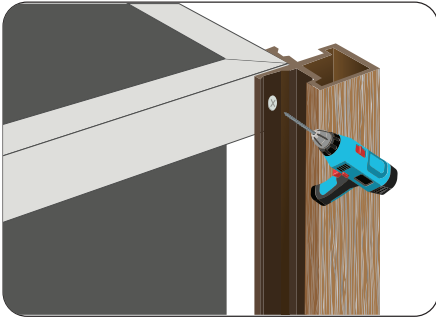


4 Attach Crossroad Trim to the corner batten using screws.

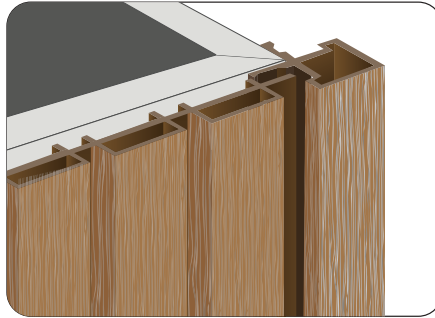

5 Install the next cladding board by fitting it securely over the previous board.

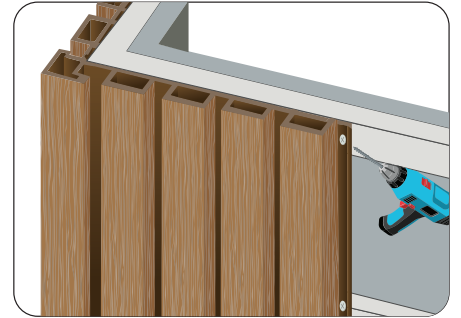


6 Insert the first cladding board into the Crossroad Trim and secure it to the batten with screws.

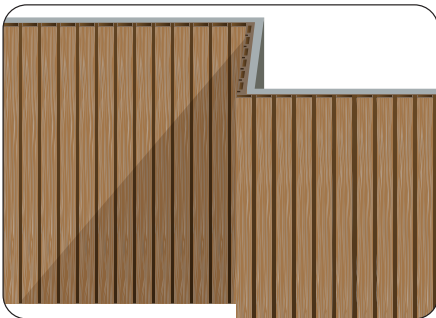

7 Once installation is complete, inspect the cladding to ensure a clean, high-quality finish.

FIXTURES REQUIRED



Suitable Battens / Joist



25mm Screws
(Not included on your order)

